

ultrammat 2

HIGH SPEED AMALGAMATOR

HOCHFREQUENZ MISCHGERÄT

AMALGAMADOR DE ALTA VELOCIDADE

AMALGAMADOR DE ALTA VELOCIDAD

VIBREUR ELECTRONIQUE A GRANDE VITESSE

VIBRATORE PER AMALGAMA AD ALTA VELOCITÀ

HIGH SPEED CAPSULESCHUDDER

HØJHASTIGHEDS-KAPSELRYSTER

HØYHASTIGHETS-KAPSELRYSTER

NOPEA KAPSELISEKOITIN

ΥΨΗΛΗΣ ΤΑΧΥΤΗΤΑΣ ΔΟΝΗΤΗΣ ΑΜΑΛΓΑΜΑΤΟΣ

WYSOKOOBROTOWY MIESZALNIK

NAGY SEBESSÉGŰ KAPSZULARÁZÓGÉP

SUURE KIIRUSEGA AMALGAAMISEGISTI

HITRI MEŠALEC AMALGAMA

AUGSTAS FREKVENCES AMALGAMATORS

DIDELIŲ APSUKŲ AMALGAMŲ MAIŠYTUVAS

VYSOKORYCHLOSTNÍ AMALGAMÁTOR

HITRI MEŠALEC AMALGAMA

高速アマルガムミキサー

高速银汞调拌机



SDI

ultramat 2


5 year warranty
amalgamator



High speed amalgamator

- Safety feature
- Consistent accurate trituration
- Practical
- Multi-use mixer
- High energy output
- Low energy usage
- 5 year warranty
- Simple to use
- Quiet low vibration
- Dual voltage


5 years warranty

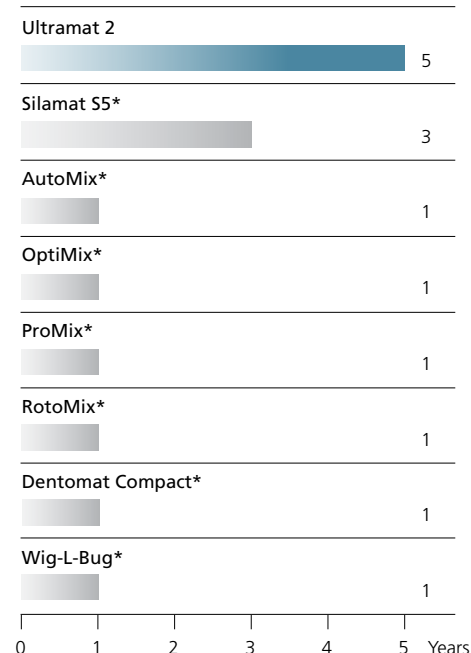

ultrammat 2 features:


Consistent and accurate trituration

The Ultramat 2 features a 0-16 second microprocessor-crystal controlled oscillator timer.




Multi-use mixer

The multi-use Ultramat 2 is suitable for all types and brands of glass ionomer, amalgam and cement capsules.




Quiet low vibration

The Ultramat 2 is the quietest, low vibration mixer.




Safety feature

The micro-switch automatically halts trituration when the lid of the Ultramat 2 is lifted.




Simple to use

The touch control system of the Ultramat 2 is quick and simple to operate.




High energy output

The high energy Ultramat 2 has a mixing frequency of 4600 oscillations per minute $\pm 1\%$.




Practical

The one surface cover facilitates infection control cleaning and the non-porous plastic surface can be cleaned with any dental disinfectant.



Low energy usage

The Ultramat 2 has economical low energy usage.




5 year warranty

The Ultramat 2's robust and reliable construction assures your purchase is a long lasting investment.



Dual Voltage

The Ultramat 2 operates on voltages between 120 and 240v, 50 and 60Hz, for compatibility with multiple power voltages and frequencies.



ultrammat 2



Dimensions:

width	depth	height
217mm	173mm	180mm
8 1/2"	6 3/4"	7 1/8"

Voltage:

120 / 240 volts

50 / 60 Hz

Weight:

2.765kg

6.095lbs

Ultramat 2

(USA - includes power cord for USA)

Reorder 5546045

Ultramat 2

(All countries - includes power cord for region product is shipped to)

Reorder 5546052

*AutoMix, Dentomat Compact, OptiMix, ProMix, RotoMix, Silamat S5, Wig-L-Bug, are not registered trademarks of SDI Limited.



Made in Australia by SDI Limited

Bayswater, Victoria 3153

Australia 1 800 337 003

Austria 00800 022 55734

Brazil 0800 770 1735

France 00800 022 55 734

Germany 0800 100 5759

Ireland 01 886 9577

Italy 800 780625

New Zealand 0800 734 034

Spain 00800 022 55 734

United Kingdom 00800 022 55 734

USA & Canada 1 800 228 5166

www.sdi.com.au