

# Aestiva/5 anesthesia machine

## More than superior ventilation

### Features

#### Superior ventilation: 7900 SmartVent™

---

- Volume Mode, pressure
- Volume Mode, Pressure Control Mode, Pressure Support (PSVPro®), Synchronized Intermittent Mandatory Ventilation (SIMV), electronic PEEP
- Tidal volume compensation
- One motion from mechanical to manual mode
- Two key presses to total standby: end case
- Cardiac bypass case mode

#### Open systems architecture

---

- Lower overall height
- User configurable drawers/shelving

#### Innovative patient breathing system

---

- Eight machine hoses/cables integrated
- “No tools” disassembly of components
- Autoclavable and latex-free
- Responsive location of common gas outlet



Aestiva®/5  
Two vaporizer configuration



Aestiva/5  
Three vaporizer configuration

#### Improved low flow/reduced life cycle costs

---

- Fresh gas flow compensation—automatically
- Smooth, faster acting fresh gas flow control
- Minimum O<sub>2</sub> flow of 50 mL
- Dual air flow tube for low flow
- Two scheduled maintenance checks per year



## Physical Specifications

### Dimensions

	<b>2 vaporizer configuration</b>	<b>3 vaporizer configuration</b>
Height:	135.8 cm/53.4 in	135.8 cm/53.4 in
Width:	75 cm/29.5 in	93 cm/36.6 in
Depth:	83 cm/32.7 in	83 cm/32.7 in
Weight:	Approximately 136 kg/300 lb	Approximately 154 kg/340 lb

### Top shelves (optional)

	<b>2 vaporizer configuration</b>	<b>3 vaporizer configuration</b>
Weight limit:	46 kg/100 lb	46 kg/100 lb
Width:	47.5, 67.5 or 87.5 cm/ 18.7, 26.6 or 34.4 in	87.5 or 67.5 cm/ 34.4 or 26.6 in
Depth:	41 cm/16.1 in	41 cm/16.1 in

### Work surface

Height:	87.6 cm/34.5 in
Width:	47 cm/18.5 in
Depth:	31.5 cm/12.4 in

### Folding side shelf (optional)

Height:	87.5 cm/34.5 in
Width:	26.5 cm/10.4 in
Depth:	31.5 cm/12.4 in
Weight limit:	11.3 kg/25 lb

### DIN rail (optional)

Side of tabletop:	30 cm/12 in
Side of machine:	23.5 cm/9.25 in

### Top drawer (1 standard)—locking (internal dimensions)


Height:	10.5 cm/4.1 in
Width:	38.5 cm/15.2 in
Depth:	26 cm/10.2 in

### Lower drawers (optional)\*

Height:	14.5 cm/5.7 in
Width:	38.5 cm/15.2 in
Depth:	26 cm/10.2 in

### Lower shelves (optional)\*

Heights:	9.2 cm/3.7 in	13.2 cm/5.2 in
	20.6 cm/8.2 in	24.6 cm/9.8 in
	28.6 cm/11.4 in	36 cm/14.4 in
Width:	42.5 cm/16.75 in	42.5 cm/16.75 in
Depth:	36 cm/14 in	36 cm/14 in

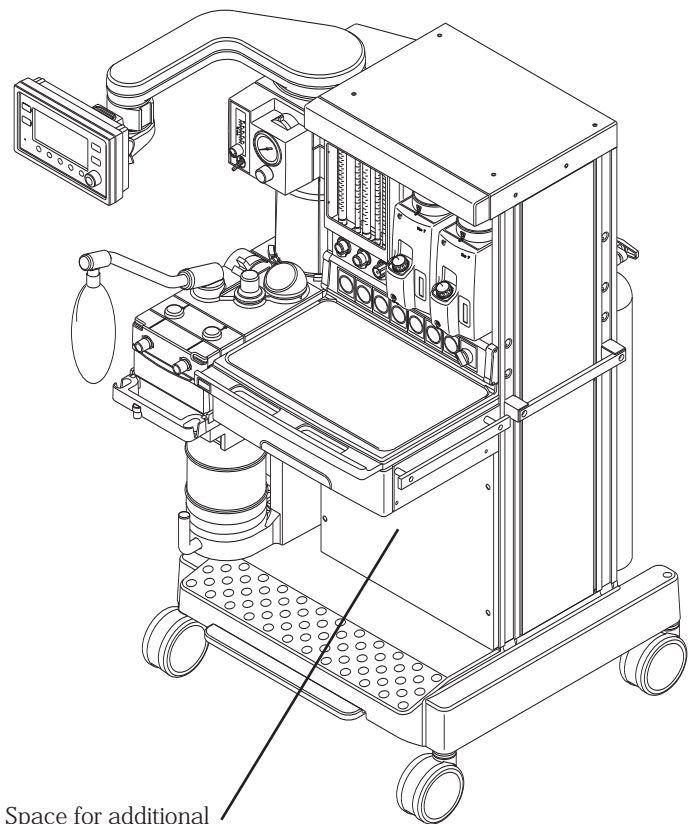

Space for additional shelves and drawers

\* Lower cabinet can be configured with a variety of shelf and drawer combinations

## Absorber arms

	Adjustable	Non-adjustable
Arm length:	30.5 cm/12 in	25.4 cm/10 in
Bag arm height:	87 cm/34.3 in 104 cm/40.9 in	91.5 cm/36 in
Absorber rotation:	85°	85°


## Ventilator screen

Height:	7.6 cm/3 in
Width:	15.2 cm/6 in

## Casters

Diameter:	12.5 cm/5 in
Brakes:	Single foot lever locks and unlocks two front casters

## Ventilator operating specifications

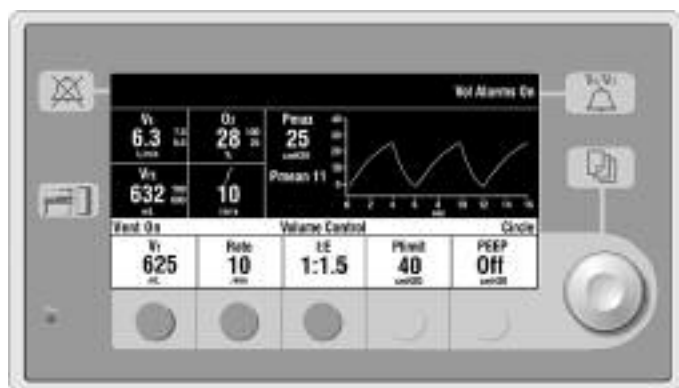

## Ventilation operating modes

- Volume Control
- Pressure Control
- Synchronized Intermittent Mandatory Ventilation (SIMV)
- Pressure Support (PSVPro) with Apnea Backup ventilation – (optional)

## Ventilator ( $V_T$ ) parameter ranges

Tidal volume range:	20 to 1500 mL (Volume Control and SIMV modes) 5 to 1500 mL (Pressure Control Mode)
Incremental settings:	20 to 100 mL (increments of 5 mL) 100 to 300 mL (increments of 10 mL) 300 to 1000 mL (increments of 25 mL) 1000 to 1500 mL (increments of 50 mL)
Minute volume range:	0 to 99.9 L/min
Pressure ( $P_{\text{Inspired}}$ ) range:	5 to 60 cm H <sub>2</sub> O (increments of 1 cm H <sub>2</sub> O)
Pressure ( $P_{\text{limit}}$ ) range:	12 to 100 cm H <sub>2</sub> O (increments of 1 cm H <sub>2</sub> O)
Pressure ( $P_{\text{support}}$ ) range:	Off, 2 to 40 cm H <sub>2</sub> O (increments of 1 cm H <sub>2</sub> O)
Rate:	4 to 100 breaths per minute for Volume Control and Pressure Control; 2 to 60 breaths per minute for SIMV, PSVPro and SIMV-PC+PSV (increments of 1 breath per minute)
Inspiratory/expiratory ratio:	2:1 to 1:8 (increments of 0.5)
Inspiratory time:	0.2 to 5.0 seconds (increments of 0.1 seconds) (SIMV and PSV Pro)
Trigger window:	0 to 80% (increments of 5%)
Flow trigger:	0.2 to 1.0 L/min (increments of 0.2 L/min) 1 to 10 L/min (increments of 0.5 L/min)
Inspiration termination level:	5 to 75% (increments of 5%)
Backup mode delay:	10 to 30 seconds (increments of 5 seconds)

## Positive End Expiratory Pressure (PEEP)

---

Type:	Integrated, electronically controlled
Range:	OFF, 4 to 30 cm H <sub>2</sub> O (increments of 1 cm H <sub>2</sub> O)

## Ventilator performance

---

Pressure range at inlet:	240 kPa to 700 kPa/ 35 psig to 100 psig
Peak gas flow:	120 L/min + fresh gas flow
Flow valve range:	1 to 120 L/min
Flow compensation range:	200 mL/min to 15 L/min

## Ventilator monitoring

---

Expiratory minute volume range:	0 to 99.9 L/min
Expiratory tidal volume range:	0 to 1500 mL
O <sub>2</sub> %:	5 to 110%
Peak pressure:	-20 to 120 cm H <sub>2</sub> O
Mean pressure:	-20 to 120 cm H <sub>2</sub> O
Plateau pressure:	0 to 120 cm H <sub>2</sub> O
Pressure waveform sweep speed:	4 to 25 breaths per minute (0 to 15 seconds) 26 to 75 breaths per minute (0 to 5 seconds) 75 breaths per minute (0 to 3 seconds)

## Ventilator accuracy

### Delivery/monitoring accuracy

---

Volume delivery:	> 210 mL = better than 7% < 210 mL = better than 15 mL < 60 mL = better than 10 mL
Pressure delivery:	±10% or ±3 cm H <sub>2</sub> O
PEEP delivery:	±1.5 cm H <sub>2</sub> O
Volume monitoring:	> 210 mL = better than 9% < 210 mL = better than 18 mL < 60 mL = better than 10 mL
Pressure monitoring:	±5% or ±2 cm H <sub>2</sub> O

## Alarm settings

---

Tidal volume (V <sub>TP</sub> ):	Low: OFF, 0 to 1500 mL High: 20 to 1600 mL, OFF
Minute volume (V <sub>P</sub> ):	Low: OFF, 0 to 10 L/min High: 0 to 30 L/min, OFF
Inspired oxygen (FiO <sub>2</sub> ):	Low: 18 to 100% High: 18 to 100%, OFF
Apnea alarm:	<i>Mechanical ventilation ON:</i> < 5 mL breath measured in 30 seconds  <i>Mechanical ventilation OFF:</i> < 5 mL breath measured in 30 seconds
Low airway pressure:	4 cm H <sub>2</sub> O above PEEP
High pressure:	12 to 100 cm H <sub>2</sub> O (increments of 1 cm H <sub>2</sub> O)
Sustained airway pressure:	<i>Mechanical ventilation ON:</i> P <sub>limit</sub> < 30 cm H <sub>2</sub> O, the sustained limit is 6 cm H <sub>2</sub> O  P <sub>limit</sub> 30 to 60 cm H <sub>2</sub> O, the sustained limit is 20% of P <sub>limit</sub>  P <sub>limit</sub> > 60 cm H <sub>2</sub> O, the sustained limit is 12 cm H <sub>2</sub> O  <i>PEEP and mechanical ventilation ON:</i> Sustained limit increases by PEEP minus 2 cm H <sub>2</sub> O  <i>Mechanical ventilation OFF:</i> P <sub>limit</sub> 60 cm H <sub>2</sub> O, the sustained limit is 50% of P <sub>limit</sub> P <sub>limit</sub> > 60 cm H <sub>2</sub> O, the sustained limit is 30 cm H <sub>2</sub> O
Subatmospheric pressure:	Paw < -10 cm H <sub>2</sub> O
Alarm silence countdown timer:	120 to 0 seconds

## Ventilator components

### Flow transducer

---

Type: Variable orifice flow sensor

Dimensions: 22 mm OD and 15 mm ID

Location: Inspiratory outlet and expiratory inlet

Optional autoclavable sensor available

### Oxygen sensor

---

Type: Galvanic fuel cell

Life cycle: Approximately 18 months (dependent on usage)


### Anesthetic agent delivery

---


Vaporizers: Tec 4, Tec 5, Tec 6 Plus, Tec 7

Number of positions: 2 or 3

Mounting: Tool-free installation Selectatec® manifold interlocks and isolates vaporizers

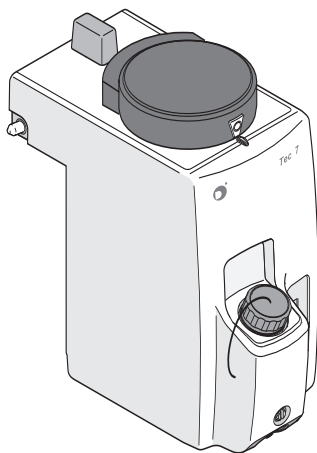

Tec 7

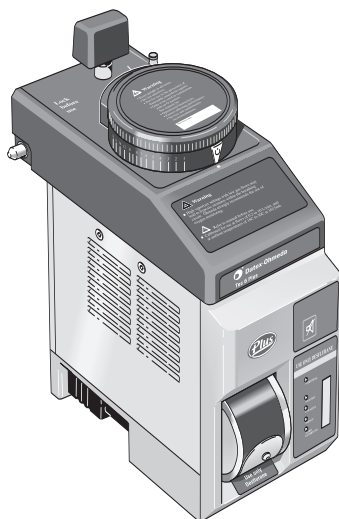

Tec 6 Plus

## Electrical specifications

### Current leakage

---

120 V: < 300 $\mu$ A

### Light package

---

Task light: 12 V, 3 lamps, type 194, .270A each

Goose neck (optional): 12 V, type 1815, .200A

### Power and battery backup

---

Power input: 120 Vac, 60 Hz, 10A

Backup power: Demonstrated battery backup time under typical operating conditions is 45 minutes when fully charged

Battery type: Internal rechargeable sealed lead acid

Power cord: Length: 5 m/16.4 ft  
Rating: 15A @ 120 Vac

### Communication port

---

Serial interface: Isolated RS-232C compatible port

### Inlet/outlet modules (120 V)

---

System circuit breakers: No outlets 5A w/outlets 10A

Outlets (optional): 4 outlets on back, 3-2A, 1-3A individual breakers and 1-5A combined outlet breaker, optional isolation transformer

Auxiliary outlet box (optional): 5 NEMA outlets on dovetail-mounted box, 5-2A breakers, isolation transformer

Tec 6 Plus outlet: 1 IEC 320 located above vaporizer backbar

## Pneumatic specifications

### Internal common gas outlet

---

Connector: ISO 22 mm OD and 15 mm ID

### Auxiliary common gas outlet (optional)

---

Connector: ISO 22 mm OD and 15 mm ID

### Gas supply

---

Pipeline input range: 240 kPa to 600 kPa/  
35 psig to 88 psig

Pipeline connections: DISS-male  
All fittings available for O<sub>2</sub>, N<sub>2</sub>O, and Air, and contain pipeline filter and check valve.

Cylinder input: Pin indexed in accordance with CGA-V-1; contains input filter and check valve  
Note: Maximum 5 cylinders total; one oxygen required.

Primary regulator diaphragm minimum burst pressure: 2758 kPa/400 psig

Primary regulator nominal output: < 338 kPa/49 psig  
Pin indexed cylinder connections

### Gas power outlet (optional)

---

Connector: DISS indexed in accordance with CGA-V-5

Gas: Oxygen

Pressure and flow characteristics: Varies with source

### O<sub>2</sub> controls

---

Method: Proportionate decrease of N<sub>2</sub>O, CO<sub>2</sub>, O<sub>2</sub>/He with reduction in O<sub>2</sub> pressure

Supply failure alarm: Range: 193 kPa to 221 kPa/  
28 psig to 32 psig

Sounds at maximum volume every 10 seconds

O<sub>2</sub> flush: Range: 35 to 50 L/min

## Flowmeters

O<sub>2</sub> ranges: Two tubes: 0.05 to 0.95 L/min and 1 to 15 L/min

Minimum O<sub>2</sub> flow: 50 mL/min ±25 mL

N<sub>2</sub>O ranges: Two tubes: 0 to 0.95 L/min and 1 to 10 L/min

Air range: One tube option: 1 to 15 L/min

Two tube option: 0 to 0.95 and 1 to 15 L/min  
(low flow tube optional)

CO<sub>2</sub> (optional): One tube: 0 to 0.5 L/min

Heliox range (optional): One tube: 0 to 15 L/min

Calibration:	Percent of full scale flow	Accuracy (% of flowrate)
	100	±2.5%
	90	±2.5%
	80	±2.6%
	70	±2.7%
	60	±2.9%
	50	±3.1%
	40	±3.4%
	30	±4.0%
	20	±5.0%
	10	±8.1%

Calibration conditions:\* 20°C/68°F  
101.3 kPa/760 mmHg

\* Different breathing circuit pressures, barometric pressures or temperatures change flowtube accuracy.

### Hypoxic guard system

---

Type: Mechanical Link-25™

Range: Provides a nominal 25% concentration of oxygen in any O<sub>2</sub>/N<sub>2</sub>O mixture

### Materials

---

All materials in contact with patient gas are free of natural rubber latex.

## Environmental specifications

### System operation

---

Temperature:	10° to 40°C/50° to 104°F
Humidity:	15 to 95% relative humidity (non-condensing)
Altitude:	-440 to 3565 m/500 to 800 mmHg

### System storage

Temperature:	-25° to 65°C/-13° to 149°F
Humidity:	10 to 100% relative humidity (including condensing)
Altitude:	-440 to 5860 m/375 to 800 mmHg

Oxygen cell storage:	-15° to 50°C/5° to 122°F
	10 to 95% relative humidity
	500 to 800 mmHg

### Electromagnetic compatibility

---

Immunity:	Complies with all requirements of EN 60601-1-2
Emissions:	CISPR 11 group 1 class B
Approvals:	UL 2601-1, CSA C22.2 #601.1 IEC 601-1 EN 60601-1

© 2005 General Electric Company – All rights reserved.  
GE and GE Monogram are trademarks of  
General Electric Company.

Aestiva, Tec, PSVPro and Mechanical Link-25 are  
trademarks of Datex-Ohmeda, Inc.

Datex-Ohmeda, Inc., a General Electric company,  
going to market as GE Healthcare.

For more than 100 years, healthcare providers  
worldwide have relied on GE Healthcare for medical  
technology, services, and productivity solutions. So  
no matter what challenges your healthcare system  
faces, you can always count on GE to help you  
deliver the highest quality healthcare. For details,  
please contact your GE representative today.

GE Healthcare  
P.O. Box 7550  
Madison, WI 53707-7550  
USA

[www.gehealthcare.com](http://www.gehealthcare.com)

