

Biomedical Refrigerator with Freezer Combination



A member of the Panasonic Group

MPR-215F
MPR-414F
MPR-715F



**MPR Series
Biomedical
Refrigerator
with Freezer**



Features:

- Energy-saving storage solutions for uniformity, reliability and environmentally safe operation.
- SANYO designed refrigeration systems designed for precise and stable vaccine and biologics storage.

www.sanyobiomedical.com

My Life. My Work. My Choice.

MPR Series Pharmaceutical Refrigerator with Freezer



SANYO MPR Series pharmaceutical refrigerators with freezer combine high performance refrigeration, control and alarm/monitoring systems with energy efficient, cost-effective cabinet design. One unit with dual temperature zone needs only minimal space. The two door design reduces air loss during door openings.

Biomedical Refrigerator with Freezer Combination

Model Number	Refrigerator Volume (cu.ft.)	Freezer Volume (cu.ft.)	Exterior Dimensions (w x f-b x h)	Temperature Range (forced air)	Temperature Range (cold air)	Voltage, Power Connection
MPR-215F	6.2	1.4	21.3" x 21.9" x 70.5"	2°C to 14°C	-20°C to -30°C	115V NEMA 5-15
MPR-414F	12.0	2.9	31.5" x 23.6" x 71.0"	2°C to 14°C	-20°C to -30°C	115V NEMA 5-15
MPR-715F	14.7 415 L	6.2 176 L	35.4" x 28.1" x 75.2" 900 x 715 x 1910 mm	2°C to 14°C	-20°C to -30°C	115V NEMA 5-15

MPR-715F

Validated Storage of Reagents, Pharmaceuticals and Biological Samples:

- NEW energy saving LED lighting.
- Microprocessor controller and interior forced air circulation.
- Safe and secured storage behind a keyed locking door.
- Integrated alarm functions.
- One unit with dual temperature zone needs only minimal installation space.
- Four-door design reduces air loss during door openings.
- Double-pane windows with heat reflection film reduces the condensation.
- Calibration adjustment through the control panel is available.
- The MPR series combo units have two separate specially designed compressors and offers quiet operation.

Shown below: MPR-715F with storage bins (optional)



Application Specific Performance

Superior uniformity for precise and stable temperature control and monitoring of your vaccines, reagents and other biologicals.

Applications

Restriction enzyme and reagent preservation

-20°C



Biological Sample Preservation

-30°C



Fresh frozen human blood plasma and vaccine preservation

-30°C



SANYO Cycle Defrost

Unique cycle defrost (refrigerator only) initiates only as required; maintains internal temperature uniformity without fluctuation due to a defrost cycle.

SANYO-Designed Refrigeration

SANYO-designed compressors allow differential control of individual refrigerator and freezer compartments.

Validatable Storage

Laboratory-grade integrated systems are designed to assure stored product safety.

Microprocessor Controls

Comprehensive setpoint, alarm, monitoring and diagnostic functions based on SANYO-built microprocessor controller with digital display of all input/output functions.

Alarm & Safety Functions

	MPR-215F	MPR-414F
Temperature Alarm	Yes	Yes
Overheating Protection	Yes	Yes
Memory Back-up Function	Yes	Yes
Door Ajar	Yes	Yes
Self-diagnostic function	Yes	Yes
Key Lock Switch	Yes	Yes

Application Specific Preservation

SANYO offers a selection of Pharmaceutical Refrigerators and Freezers that include significant design and performance properties which differentiate them from conventional household refrigerators that are not suitable for pharmacy use.

Vaccine Storage

Variations in temperature and failure to follow storage and monitoring requirements can drastically affect the effectiveness of vaccines through non-compliance of regulatory standards of governing agencies. SANYO designs equipment for specific applications while meeting the standards of the Food and Drug Administration (FDA), American Association of Blood Banks (AABB), Joint Commission on Accreditation of Healthcare Organizations (JCAHO), International Committee for Harmonization (ICH), and United States Department of Agriculture (USDA).

Key Advantages of SANYO Application Specific Refrigeration


- Digital temperature sensors inside the refrigerator and controllers built specifically to maintain a set temperature within the 2°C to 8°C temperature range
- Evaporator operates at 2°C, therefore preventing vaccines from freezing
- Alarms and temperature monitoring for quick notification of adverse operating conditions
- Fan-forced air circulation for precise temperature uniformity
- Efficient temperature recovery properties. Minimal temperature fluctuations around set points

SANYO MPR Series vs Domestic Refrigerator


Model Number	MPR Series	Domestic Refrigerator
CFC-Free, reliable temperature control not affected by ambient temperature	Yes	No
Digital Display of chamber temperature	Yes	No
Precise temperature setting of chamber with microprocessor control	Yes	No
Variable temperature control of Refrigerator (2°C – 4°C)	Yes	No
Variable temperature control of Freezer (-20°C – -30°C)	Yes	Max/Mid/Min
Uniform temperature at all shelf levels	Yes	No
Separate operation of Refrigerator and Freezer	Yes	18°C
Window for viewing	Yes	No
Racks (SUS-304, MPR-41R)	Yes	No
Monitoring hole/port	Yes	Some Models Yes
Temperature recorder (option)	Yes	No
Door ajar option with indicator light and audible alarm	Yes	Some Models Yes
High/low alarm and under cooling overheating protection	Yes	No
Remote alarm terminal	Yes	No
Set temperature deviation	Yes	No
Self diagnostic function	Yes	No
Unique cycle defrost automatic defrost system	Yes	No
Condensate evaporator	Yes	Yes

Performance Data of MPR Series


Refrigerator pull-down data



Freezer chamber temperature cycle of MPR-414F compared to standard home-use refrigerators



Relationship between chamber temperature and ambient temperature change (compared to standard home-use refrigerators)

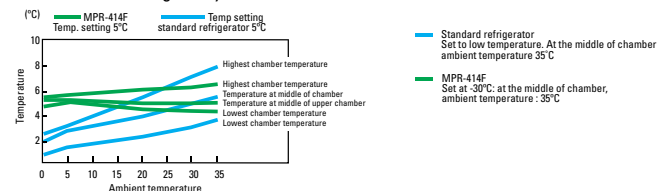

MPR Series Specifications

Biomedical Refrigerator with Freezer Combination

MPR-215F			MPR-414F		MPR-715F	
Model	Refrigerator	Freezer	Refrigerator	Freezer	Refrigerator	Freezer
Effective Capacity <i>Designed for storage of vaccines and pharmaceuticals in the hospital, laboratory or medical office.</i>	6.2 cu. ft. 176 L	1.4 cu. ft. 39 L	12.0 cu. ft. 340 L	2.9 cu. ft. 82 L	14.7 415 L	6.2 176 L
External Dimensions (w x f-b x h)	21.3" x 21.9" x 70.5" 540 x 557 x 1790 mm		31.5" x 23.6" x 71.0" 800 x 600 x 1805 mm		35.4" x 28.1" x 75.2" 900 x 715 x 1910 mm	
Weight	176 lbs. 80 kg		277 lbs. 126 kg		371 lbs 168 kg	
Exterior	Polyester resin finish baked on zinc galvanized steel					
Interior	Styrol resin	Colored aluminum plate	Stainless steel	Colored aluminum plate	PCM Painted Steel	
Insulation	CFC-Free rigid polyurethane foamed in place					
Temperature Range	2°C to 14°C Ambient temperature: 30°C	-20°C to -30°C Ambient temperature: 30°C	2°C to 14°C Ambient temperature: 30°C	-20°C to -30°C Ambient temperature: 30°C	2°C to 14°C Ambient temperature: 30°C	-20°C to -30°C Ambient temperature: 30°C
Temperature Control	Microprocessor LED Display					
Cooling Method	Fan-Forced air circulation	Direct Cooling (manual defrost)	Fan-Forced air circulation	Direct Cooling (manual defrost)	Fan-Forced air circulation	Direct Cooling (manual defrost)
Compressor	60W	60W	160W	160W	150W	200W
Refrigerant	R-134A (HFC)					
Shelves	3 (44 lbs./shelf)	1 (22 lbs./shelf)	Large: 2 (55 lbs./shelf) Small: 3 (33 lbs./shelf)	1 (22 lbs./shelf)	3 (55 lbs./shelf)	2 (33 lbs./shelf)
Access Port	Ø 30 mm (left)	Ø 30 mm (left)	Ø 30 mm (rear)	Ø 30 mm (rear)	Ø 30 mm (rear)	Ø 30 mm (rear)
Casters	4 casters with 2 adjustable leveling feet					
Alarm and Safety	High/low temperature alarm, Door ajar alarm, Memory back up during power failure Self-diagnostics, remote alarm contacts (N.O./N.C., DC30V, 2A). Door key lock. Critical component lifespan alarm (option for MPR-715F)					
Options	2-pen type circular temperature recorder (MTR-C955)		• 2-pen type circular temperature recorder (MTR-C955) • Drawers for the bottom left compartment (MPR-41R)		• 2-pen type circular temperature recorder (MTR-C955) • Drawers for the bottom left compartment (MPR-41R) • Critical component lifespan alarm • Power failure alarm (MPR-48B) • Data collection interface (MTR L03, MTR 480) • Data monitoring software (MTR-5000 requires MTR L03 or MTR 480)	

These models are not explosion-proof/safe. DO NOT preserve chemicals that are highly volatile or corrosive.

Distributed by:



A member of the Panasonic Group

SANYO North America Corporation
Biomedical Solutions Division
 1300 Michael Drive, Suite A, Wood Dale, IL 60191
 Toll Free USA (800) 858-8442, Fax (630) 238-0074
www.sanyobiomedical.com

© SANYO Printed in USA 2011.09 AU
AU201109V2