

HX 500 and HX 750 process chillers provide you with years of reliable cooling for your critical process applications.

NESLAB HX 500 and HX 750 Series Process Chillers

Long-term reliability and flexible configurations tailored to your application



Typical applications for the HX 500 and HX 750:

- Sputtering
- CMP
- Test equipment
- Laser engraving
- Laser machining
- MRI
- CT
- Linear accelerators
- Printing
- Injection molding
- Military applications
- Reactor vessels

Tight Stability for Process Control

NESLAB HX 500 and HX 750 chillers offer the tight stability ($\pm 0.1^\circ\text{C}$) necessary to keep critical processes running at constant temperatures. Better process control keeps your equipment running at optimal levels, giving you the results you need.

Versatile, Flexible Configurations

Depending on your facility requirements, you can select air or water-cooled condensers. Choose the TC 400 for more automated, powerful operation. Different pump types are available to suit a wide range of pressures and flow rates.

Worry-free Operation

NESLAB HX 500 and HX 750 process chillers are easy to install and offer years of reliable cooling. These robust units are designed for trouble-free operation to maximize uptime. Panels are easy to remove for quick access to components.

Choice of Options and Accessories

While each Thermo unit comes with many standard features, a full range of options and accessories is available to meet your specific application needs.



System Specifications

Thermo Electron Corporation has a well-established reputation in temperature control through its NESLAB and HAAKE product lines. Formerly independent companies, NESLAB and HAAKE have joined forces within Thermo to offer you more than 75 years of industry experience in temperature control technology. Thermo professionals worldwide continue to develop and support the solutions that help you analyze, detect, measure, and control your business with increasingly advanced precision.

Specifications

	HX 500	HX 750
Standard temperature range		
C	5° to 35°	5° to 35°
F	41° to 95°	41° to 95°
Ambient temperature range		
C	13° to 35°	13° to 35°
F	55° to 95°	55° to 95°
Stability		
C	+/- 0.1°	+/- 0.1°
F	+/- 0.2°	+/- 0.2°
Condenser		
	air or water cooled	air or water cooled
Reservoir size		
	28 Gallons/106 liters	40 Gallons/151.4 liters
Cooling capacity		
60 Hz at 20°C	15,700 watts	24,000 watts
50 Hz at 20°C	13,030 watts	19,920 watts
Pump performance		
60 Hz Pump 1	23 gpm at 50 psig (TU 9)	23 gpm at 50 psig (TU 9)
60 Hz Pump 2	19 gpm at 50 psig (CP 75)	19 gpm at 50 psig (CP 75)
50 Hz Pump 1	16 gpm at 50 psig (TU 9)	16 gpm at 50 psig (TU 9)
50 Hz Pump 2	10 gpm at 40 psig (CP 75)	10 gpm at 40 psig (CP 75)
Power requirements		
60 Hz	208-230V 3ø/460V 3ø	208-230V 3ø/460V 3ø
50 Hz	380-415V 3ø	380-415V 3ø
Unit dimensions		
in (H x W x D)	51.625 x 46 x 28.75	64.75 x 46 x 29
cm (H x W x D)	131.1 x 116.8 x 73	164.5 x 116.8 x 73.7
Plumbing connections		
inlet/outlet process	1" FNPT	1" FNPT
inlet/outlet facility (W/C only)	1" FNPT	1" FNPT
Plumbing connection		
drain	1/2" FNPT	1/2" FNPT
auto refill	3/8" OD SS barb	3/8" OD SS barb
Refrigerant		
60 Hz	R22	R404A
50 Hz	R134A	R404A
Compliance		
50 Hz units	CE	CE
Unit weight		
lb	746	971
kg	338.4	440.4

Specification listed for standard units circulating water at 20°C fluid temperature and 20°C ambient. Other fluids, fluid temperatures, or ambient temperatures will affect performance. Cooling capacity and amperage based on units with CP 75 pumps.

Standard Features

Feature	Benefit
Auto-refill	Allows for self-filling of the chiller to ensure that the proper level in the reservoir is maintained
Stainless steel reservoir (look at RTE)	Convenient easy cleaning. Compatible with a wide range of fluids
Temperature stability of +/- 0.1°C	Keeps your process stable giving you consistent, reliable results
High and low temperature safeties	Can be configured as warnings or, will shut the unit down to keep your application safe
Auto-restart	In the event of power failure, the unit will automatically restart, upon power restoration which ensures productivity
Low level safety	Alarms you if the reservoir level is too low
Hot gas by-pass	Refrigeration design that allows for tight temperature stability and longer compressor life
Compact footprint	Efficient design keeping your valuable floor space to a minimum
15-Pin analog control port	Allows for remote status of alarms and remote on/off capabilities
Integrated fluid pressure gauge and flow control	Provides integral pressure and flow control to adjust to your process needs


Options

Feature	Benefit
Pump selection	Various pumps available to meet the flow and pressure requirements of your application
Air-cooled or water-cooled condenser	Configurable to your facilities needs
High temperature range	Allows heating as well as cooling and high temperature operation up to +90°C
Powerful TC 400 Controller <ul style="list-style-type: none">• LED status indicators• Alarm Status• Low flow• RS-232	User-friendly interface that allows more sophisticated monitoring and control of HX operation
Communication RS-232	Allows for control of your chiller from your PC or laptop


Accessories

Feature	Benefit
Remote temperature probe	Allows for remote temperature control at your application
Fluid filtration 5, 25, 40, micron full flow	Maintains particulate-free operating fluid
Fluid filtration 5, 25, 40, micron partial flow	Maintains particulate-free operating fluid
DI filtration	Maintains a water resistivity level between 1 and 3 megohm/cm2 for cooling applications requiring ultrapure water or electrical isolation of the application
Plumbing package	Provides tubing, insulation and plumbing connections for easy installation
Condenser filters	Keeps the condenser clean and your unit performance optimal
Ethylene glycol	Allows circulation to temperatures below 8°C

Pumping Capacity

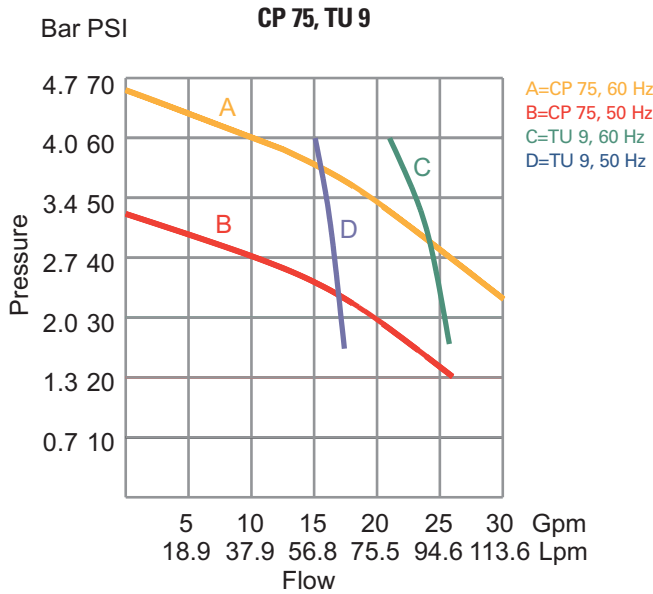

Cooling Capacity

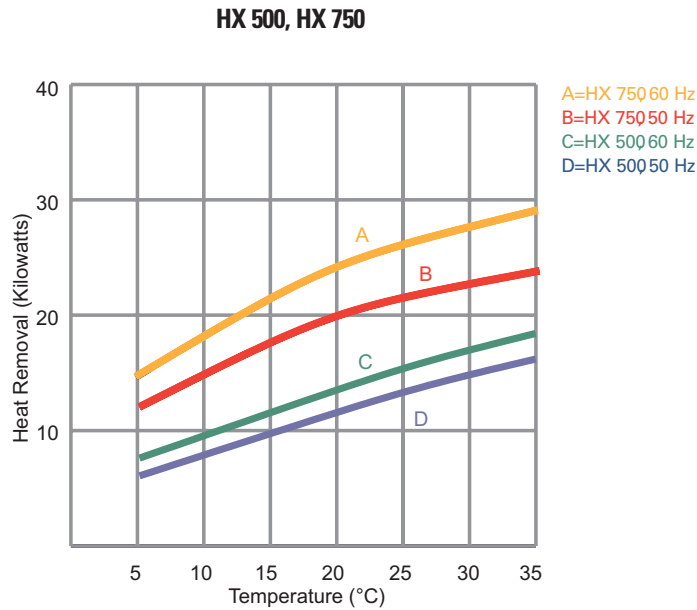

USA
 25 Nimble Hill Rd.
 Newington, NH 03801
 Tel. 800 258 0830
 info.tc.us@thermo.com

France
 16 Avenue du Québec - Silic 765
 91963 Courtaboeuf Cedex
 Tel. +33 (0) 1 60 92 48 00
 info.tc.fr@thermo.com

United Kingdom
 Unit 5, The Ringway Centre
 Basingstoke, Hampshire
 RG21 6YH
 Tel. +44 (0) 870 609 9254
 info.tc.uk@thermo.com

Benelux
 Takkebijsters
 4817 BL Breda
 Tel. +31 (0) 76 5 87 98 88
 info.tc.nl@thermo.com

International/Germany
 Dieselstr. 4
 76227 Karlsruhe
 Tel. +49 (0) 721 4 09 44 44
 info.tc.de@thermo.com

©2004 Thermo Electron Corporation. The information contained herein is subject to change without notice. Any trademarks, tradenames or copyrights remain solely the property of the manufacturer unless otherwise stated. The only warranties for Thermo products are set forth in the express limited warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Thermo shall not be liable for technical or editorial errors or omissions contained herein.

PSHX500HX750v1.0E10/04TC